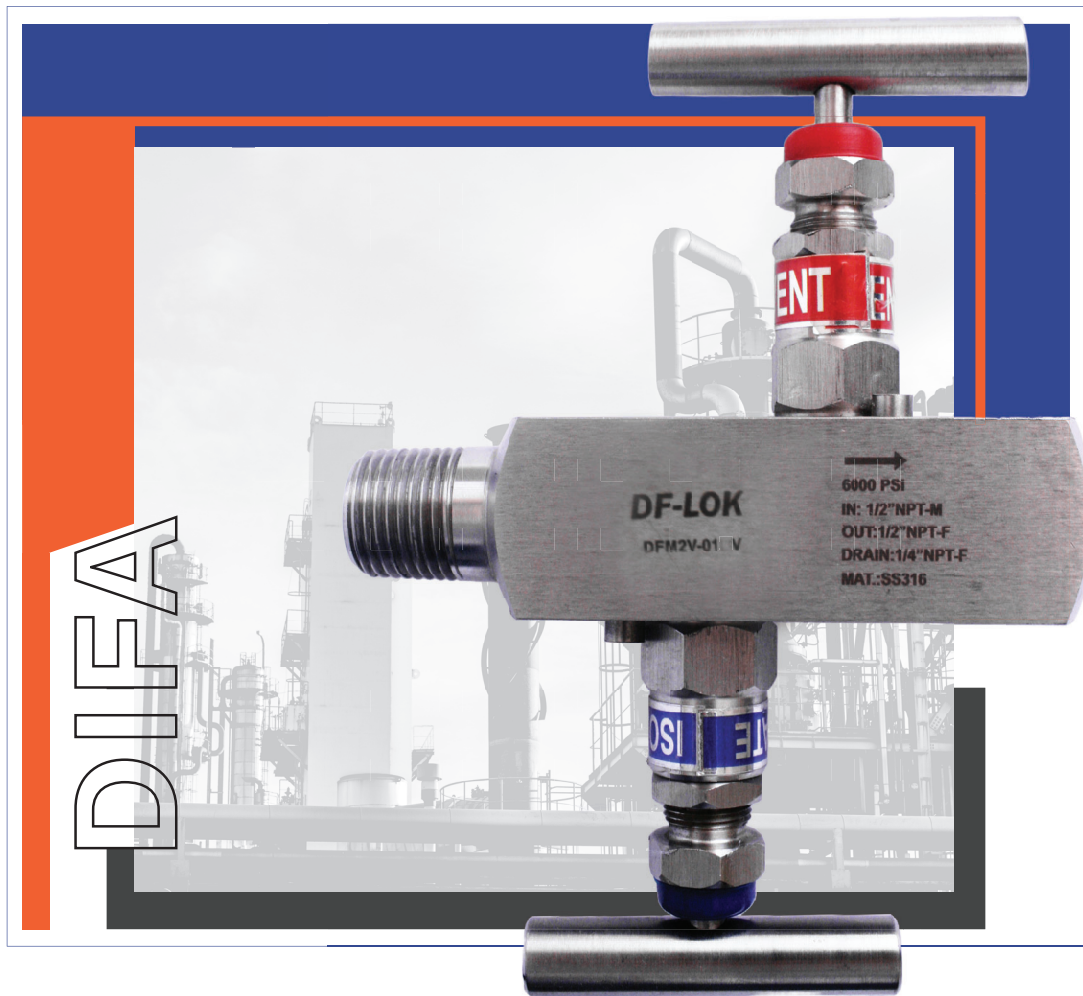


DIFA 2Valve Manifold



**DIFA 2Valve Manifold DM2V-01A Squer. Needle Valve, hard seat
6000 ~ 10000 psi**

"Compact 2-valve manifold with hard-seat needle valve, ensuring accurate isolation and calibration of pressure instruments up to 10,000 psi."

GENERAL

- Assembled directly to inline pressure transmitters.
- Block-and- Bleed and 2-valve configurations
- Male or Female threaded NPT process connection

FEATURES

- S.S 316, 316L Alloy group
- Connection Size: ½ NPT
- Working Pressure: 6000/10000
- With vent & drain ¼" / ½" NPT- F



M2V- 01C





M2V- 01B



M2V- 0CG

Ordering Information

Model	Inlet	Outlet
M2V-01B	½"NPT-FEMALE	½"NPT-FEMALE
M2V-01C	½"NPT-FEMALE	½"NPT-MALE
M2V-01D	½"NPT-MALE	½"NPT-FEMALE
M2V-01E	½"NPT-MALE	½"NPT-MALE
M2V-0CG	½"NPT-FEMALE	Suitable for CG type Rosemount pressure transmitter

Model	Description	Functional diagram
 	M2V-01C • Square design • In-line bonnet position • In-line connections M2V-0CG • Square design • In-line bonnet position • In-line connections	